



Trio Stealth Pro 9.7" Battery Replacement

A step by step guide on how to replace a Trio Stealth Pro 9.7" battery.

Written By: Edward Insogna





TOOLS:



- [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery




- Remove 2 black 4 cm Phillips screws on either side of the bottom of the device.

Step 2

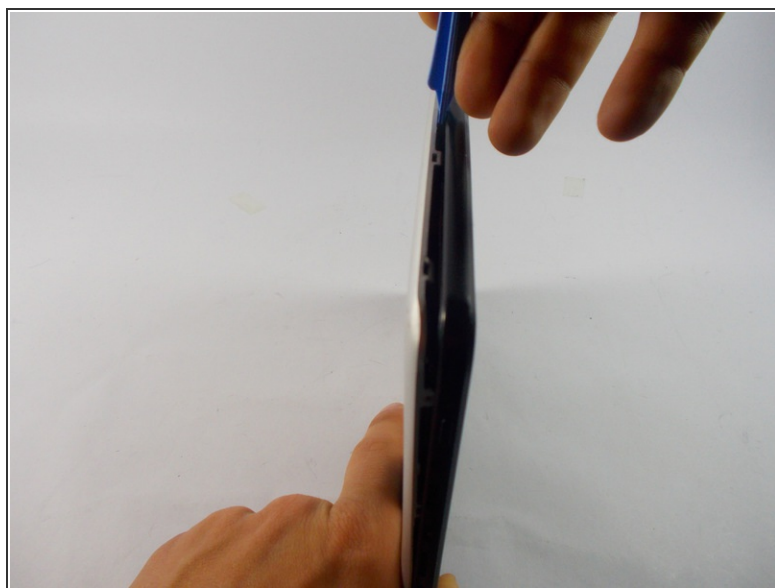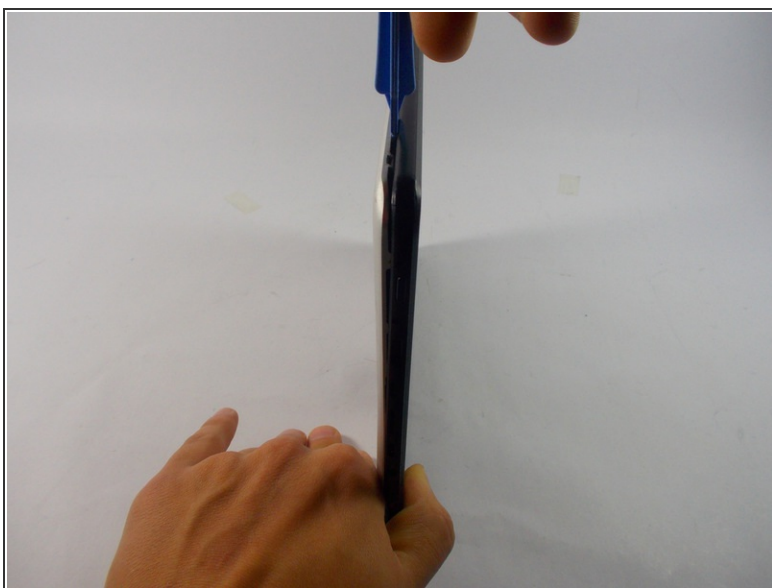


- Use the plastic opening tools and the spudger around the outside of silver metal back plate on the device to pry off the back plate.

Step 3

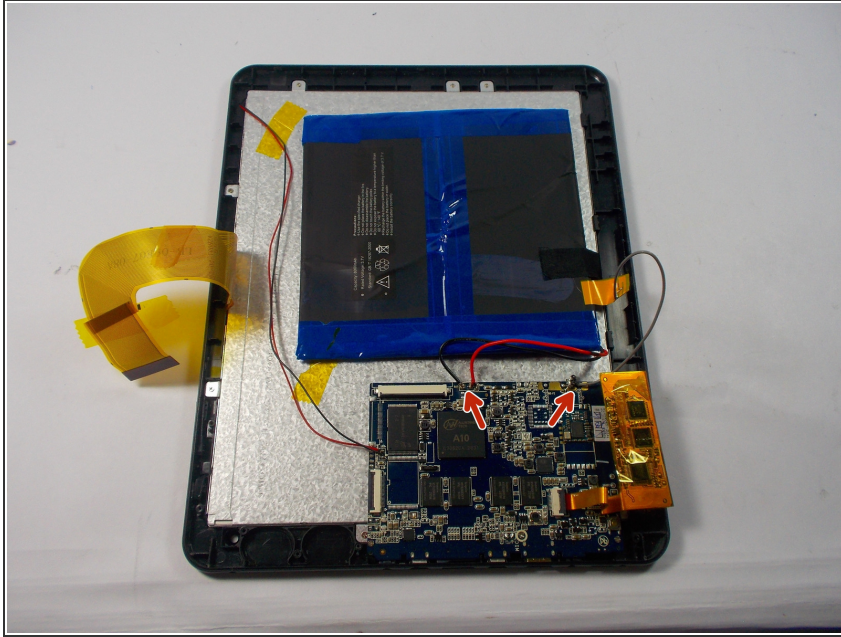



- Cut red, black, and gray wires connecting the battery to the motherboard.

Step 4

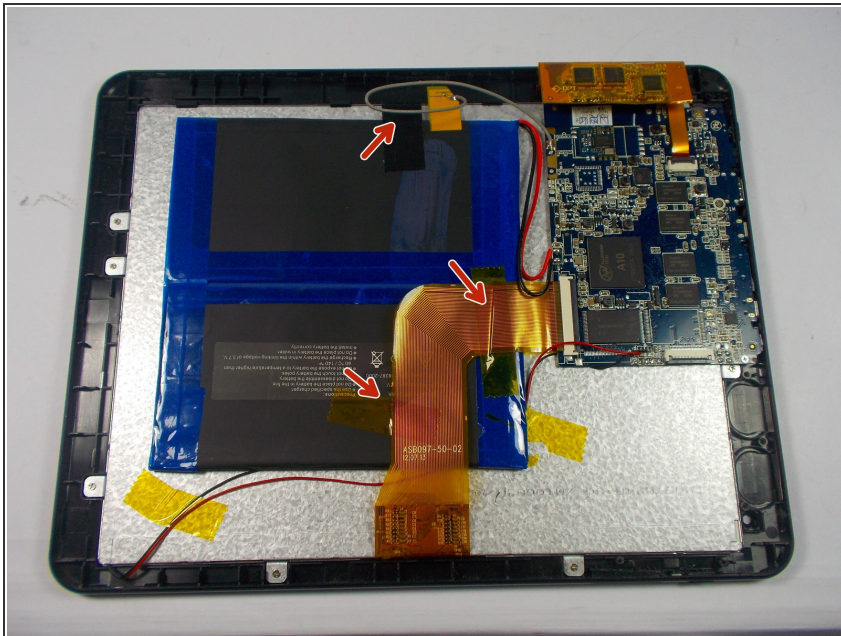

- Remove tape on top of battery.

Step 5

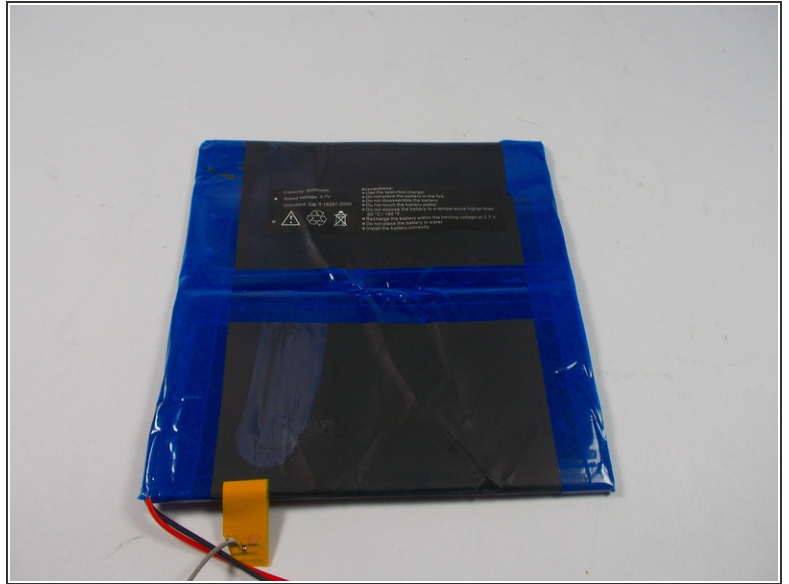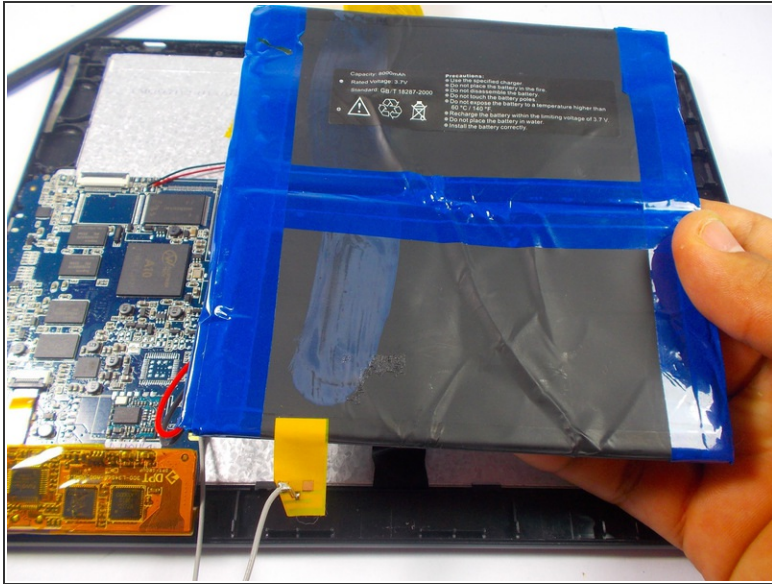

- Use the plastic opening tool and the spudger to pry up and remove the battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-09-17 11:02:51 AM.